
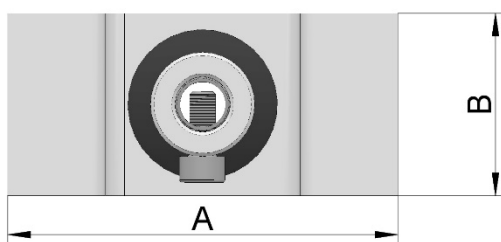


fastener type HG18 H with vibrating element

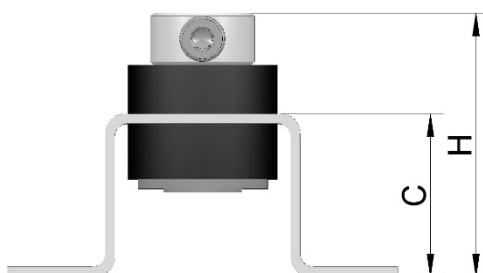

description	part-no.	dimension				shore	for stud	material
		A	B	C	H			
HG 18/15 H	H13827	60	28	15	30	40° TPE	M6	StZn
HG 18/25 H	H11231			25	40			
HG 18/50 H	H14168			50	65			

Advantages:

- quick mounting
- high distance balance
- installable in all positions
- fire resistant
- maximum permissible load = 150N/fastener

other materials or dimensions on request