


fastener type HG18 W with vibrating element

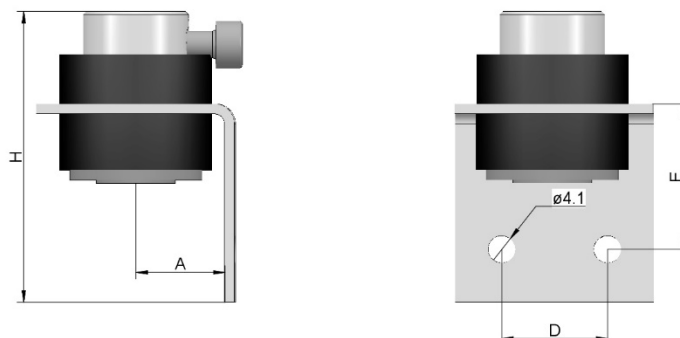

description	part-no.	dimension						shore	for stud	material
		A	B	C	D	E	H			
HG 18/30 W	H25066	15	30	30	16	22	46	40° TPE	M6	StZn
HG 18/60 W	H25071			60	16	52	76			
HG 18/80 W	H25072			80	16	72	96			
HG 18/100 W	H25070			100	16	92	116			

Advantages:

- quick mounting
- high distance balance
- installable in all positions
- fire resistant
- maximum permissible load = 150N/fastener

other materials or dimensions on request