


fastener type HG40 GM with vibrating element

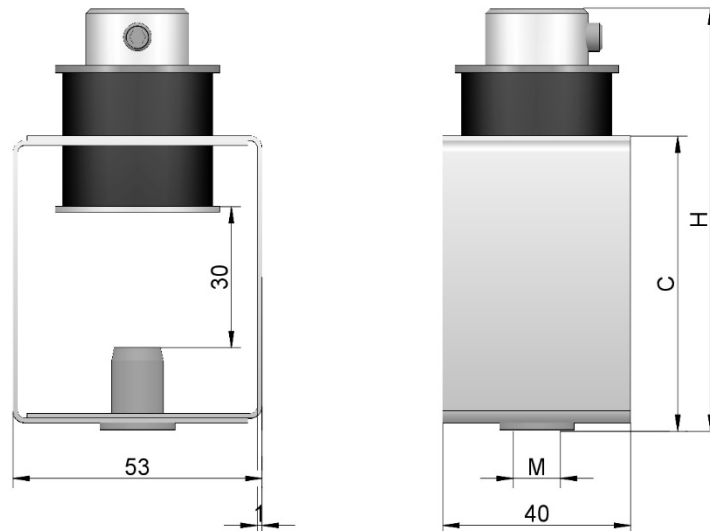

description	shore	part-no.	PU	Dimension				for stud	material
				M	B	C	H		
HG 40/60 GM6	40°±5 TPE	H11227	100	M6	40	63	90	M8	StZn
HG 40/60 GM8		H11224		M8					
HG 40/60 GM6	50°±5 TPE	H25421		M6					
HG 40/60 GM8		H25399		M8					

Advantages:

- quick mounting
- high distance balance
- installable in all positions
- fire resistant
- maximum permissible load = 250N/fastener

other materials or dimensions on request