


fastener type HG40 T with vibrating element

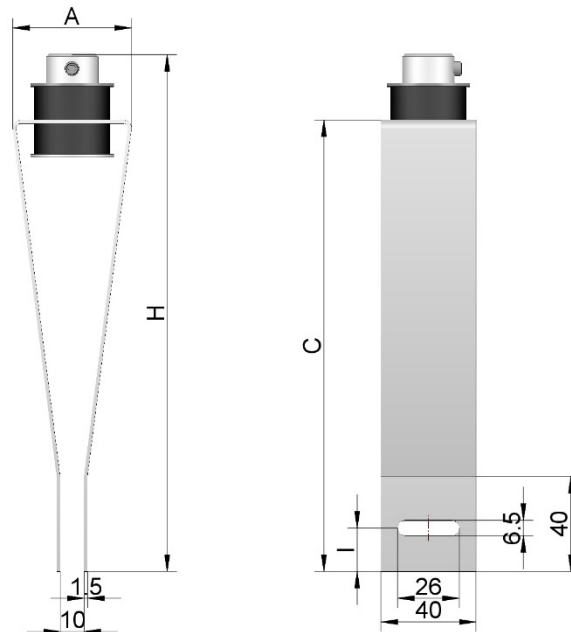

description	shore	part-no.	PU	dimension				for stud	material
				A	I	C	H		
HG 40/100 T	40°±5 TPE	H25530	100	50	15	100	129	M8/8mm	StZn
HG 40/100 T		H25743	100		20	100	129		
HG 40/190 T		H11229	75		15	190	219		
HG40/190 T	40°±5 TPE	H25733	75	50	15	190	219	M8/M10	1.4571
HG40/190 T	40°±5 silicone	H25799	75	50	15	190	219	M8/M10	StZn

Advantages:

- quick mounting
- high distance balance
- installable in all positions
- fire resistant
- maximum permissible load = 250N/fastener

other materials or dimensions on request