


fastener type HG40 U with vibrating element

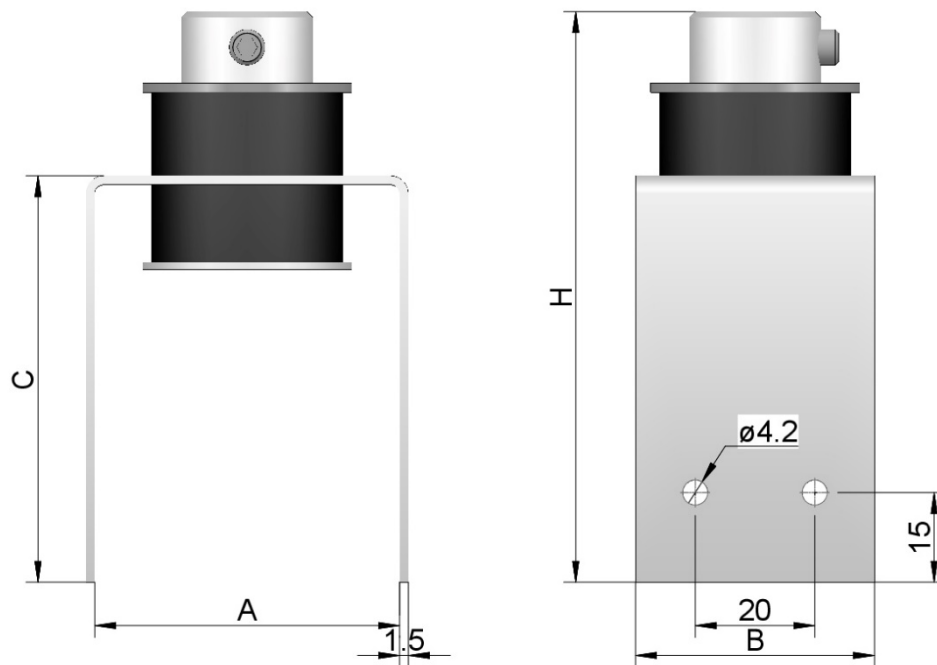

description	shore	part-no.	PU	dimension				for stud	material	comment
				A	B	C	H			
HG40/25 U	40°±5 TPE	H25916	100	52	40	26	53	M8	StZn	with one hole 4,2
HG 40/50 U		H25897		55,5		50	77			without hole 4,2
HG 40/60 U		H26009		51		68	95			
HG 40/60 U	40°±5 silicone	H25958	159	51	40	68	86	M8	StZn	

Advantages:

- quick mounting
- high distance balance
- installable in all positions
- fire resistant
- maximun permissible load = 250N/fastener

other materials or dimensions on request