


fastener type HG40 W with vibrating element

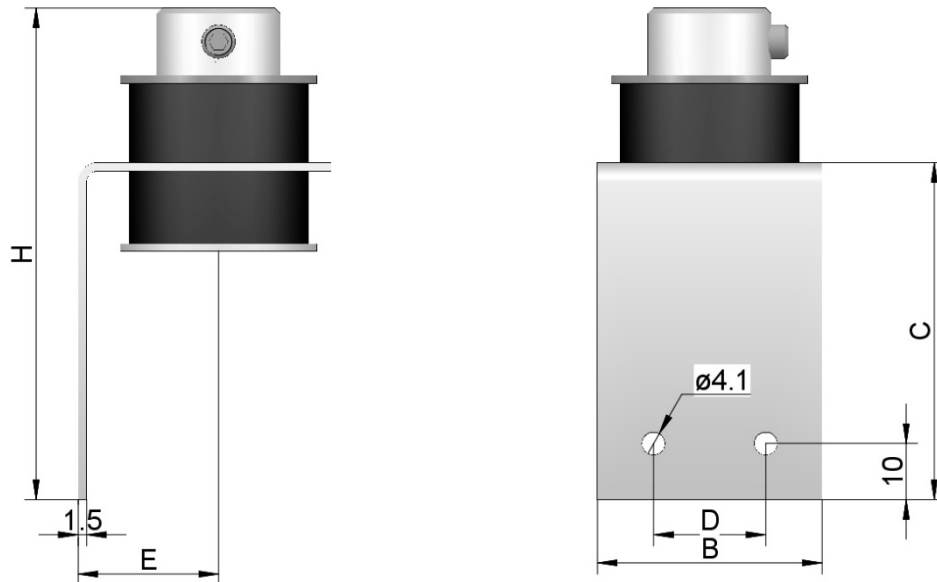

description	shore	part-no.	PU	Dimension						for stud	material
				A	B	C	D	E	H		
HG 40/40 W	40°±5 TPE	H25134	100	30	40	40	20	25	70	M8/8mm	StZn
HG 40/60 W		H13632		50		60			90		

Advantages:

- quick mounting
- high distance balance
- installable in all positions
- fire resistant
- maximum permissible load = 250N/fastener

other materials or dimensions on request