
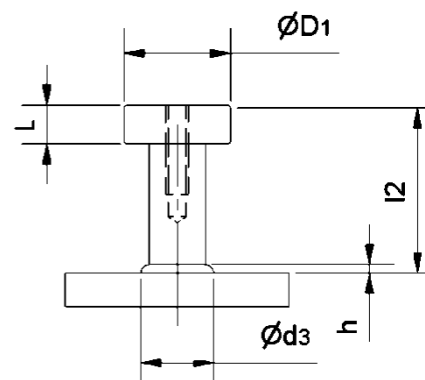


Kopfbolzen mit Innengewinde Typ KBMI

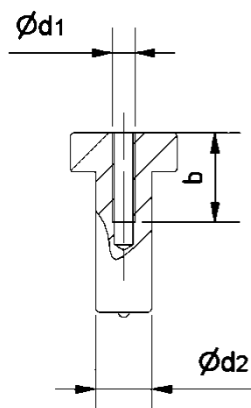

Beispielbezeichnung: d2xl2-d1xb-235JR-A2K

d2	l2	d1	b	D1	L	d3	h	Keramikring
10	30	M4	10	19	7	13	4	UF10
		M5	16					
	M6							
		50						
		75						
		100						
175								
12	30	M8	16	25	8	16	5	UF12
13	50					17		UF13
	75							
	100							
16	50	M10	20	32	10	21	7	UF16
19	50	M12		32		26	9	UF19

Material: 4.8, A2, A4,

Oberflächenbeschichtung: A2K (Verzinkt), zl (Zinklamelle)

Weitere Abmessungen auf Anfrage