


partially threaded stud type PD M6-M10
 (EN ISO 13918)

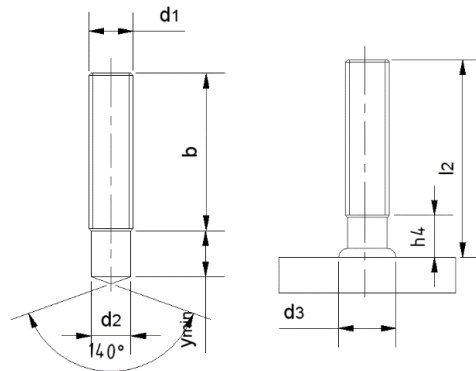

dimension (d1xl2)	d ₂	d ₃	y	b	h ₄	Kg/100*	unit	ceramic ferrule
M 6x20	5,35	8,5	9	•	3,5	0,38	500	PF6
M 6x25				•		0,45	500	
M 6x30			20	•		0,55	500	
M 6x35				•		0,64	200	
M 6x40				•		0,73	200	
M 6x50				•		0,91	200	
M 6x60				•		1,08	200	
M 8x20	7,19	10	9	•	3,5	0,69	500	PF8
M 8x25				•		0,84	500	
M 8x30				•		1,00	500	
M 8x35				•		1,16	200	
M 8x40				•		1,32	200	
M 8x45				•		1,48	200	
M 8x50			•	40		1,64	200	
M 8x55			•			1,80	200	
M 8x60			•			1,96	200	
M 10x20	9,03	12,5	9,5	•	4	1,09	500	PF10
M 10x25				•		1,34	500	
M 10x30				•		1,57	500	
M 10x35				•		1,84	200	
M 10x40				•		2,09	200	
M 10x50			•	40		2,60	200	
M 10x55			•			2,85	200	
M 10x60			•			3,08	200	
M 10x80			•			4,10	100	

material: 4.8, A2, A4,

Surface coating: A2K (galvanized), zl (Zinc flake coating)

Further dimensions on request

*are values for 4.8 bolts

K2024-9-E

Hilbig GmbH ● Postweg 204 ● 21218 Seevetal ● Germany